

Towards Multispectral, Multi-Sensor Indoor Positioning and Target Identification

S. Kaasalainen, L. Ruotsalainen and M. Kirkko-Jaakkola

Finnish Geospatial Research Institute – FGI, Department of Navigation and Positioning
Geodeetinrinne 2, 02431 Masala
FINLAND

Sanna.Kaasalainen@nls.fi

O. Nevalainen and T. Hakala

FGI, Department of Remote Sensing and Photogrammetry
Geodeetinrinne 2, 02431 Masala
FINLAND

We present a concept and first results of combining multispectral Light Detection And Ranging (lidar) with positioning sensors to produce spatially resolved target identification in indoor environment. The aim is to enhance the sensor-based indoor localization with a multispectral target identification and mapping. There is a growing need for automatic and mobile mapping and surveillance in buildings and locations where satellite positioning is not available. Lidar is a common sensor in feature-based Simultaneous Localization and Mapping (SLAM). As multispectral lidars are emerging and becoming increasingly popular in research applications, the multi/ hyperspectral point clouds are likely to improve object recognition and enable a new level of autonomous surveillance in the near future. Our first results show that position solution can be obtained using sensors attached to the lidar.

INTRODUCTION

Indoor positioning for Global Navigation Satellite System (GNSS) denied environments have been studied increasingly during the past few years [1]. Sensor positioning is based on propagating the known initial position and heading with motion measurements obtained from the sensor. However, sensor measurements suffer from errors, which deteriorate the solution in time. Therefore, fusion of sensors with different error characteristics enables the solution to stay accurate for longer time. This is particularly the case when using low-cost sensors, especially Micro-Electro-Mechanical Sensors (MEMS) [2]-[4].

Indoor positioning methods can be roughly categorized into three approaches, based on radio frequency fingerprinting, motion-based, and visual [1],[5]. As radio fingerprinting requires an existing infrastructure (such as wireless network or separate identification tags), sensor positioning is more widely applicable in any environment. Inertial sensors, namely accelerometers and gyroscopes forming an Inertial Measurement Unit (IMU), have been used for sensor positioning. IMUs provide translation and heading measurements, but they must be calibrated with some absolute positioning means or fused with motion measurements obtained from different sources, such as visual odometry [4] to improve the quality.

Combining positioning sensors and Light Detection And Ranging (lidar) has become a widely used approach for mobile mapping and robotics [4],[6]. Lidar is commonly utilized in Mobile Laser Scanning (MLS). The MLS systems also rely on GNSS, mainly for direct georeferencing of point clouds [7], but the increasing number of autonomous robotic platform applications [4],[8] has emphasized the need for better location accuracy. The growing demand for robotic and situational awareness applications in GNSS denied environments will emphasize the role of multi-sensor indoor positioning [9]. 3D detection of features with lidar is also common in Simultaneous Localization and Mapping (SLAM) [6]. SLAM provides infrastructure-free accurate and reliable localization and information on the environment by means of adaptive integration

Towards Multispectral, Multi-Sensor Indoor Positioning and Target Identification

of data from multiple sensors [8], [10]. In SLAM, lidar is typically combined with other optical and odometry sensors, IMU [4] and GNSS in outdoor applications [11].

The common estimation frameworks to produce a SLAM solution are based on Kalman Filter (KF) and Particle Filter (PF) [8]. PF was implemented in [2] to integrate motion (heading and translation) measurements from a monocular camera, foot-mounted IMU, Sound Navigation And Ranging (sonar), and a barometer to produce an accurate and reliable three-dimensional (3D) localization solution for SLAM. The horizontal accuracy was 3.14 m with standard deviation of 2.82 m. The results could be improved with more accurate error modelling and additional sensors, such as multiple IMU's or visual lidar odometry [4].

Iterative Closest Point (ICP) is a method for providing the translation and rotation between two point clouds [12]. However, ICP needs a good a priori measurement of transformation to converge. Also, when lidar is moved, the point clouds suffer from motion distortion, which should be corrected using other measurements. When these challenges are tackled and the two point clouds are matched, the difference between their position and orientation may be used to obtain motion information via lidar odometry [4].

Visual odometry measurements from a monocular camera are often used to solve the challenges related to lidar odometry, and to obtain an accurate localization solution. Monocular cameras have advantages for visual perception compared to stereo cameras; they have wider field-of-view and provide faster image processing capabilities [13]. However, traditionally stereo cameras have been mainly used, because methods based on monocular cameras usually suffer from so called ambiguous scale problem [14]. In our previous studies, we have developed a concept called visual gyroscope and visual odometer [13], which resolves the scale problem and provides absolute translation and rotation information to be used for localization.

There is a trade-off between accuracy and computing time cost in SLAM solutions, and numerous methods have been introduced to optimize the positioning solution [10],[15]. With post processing, centimetre-level accuracy can be achieved, while a real-time application could be improved to decimetre level at least for feature-rich environments [15].

Laser scanning applications have reached a new level as multi-wavelength lidar applications have emerged [16]-[18]. The output from a multispectral lidar comprises the point cloud (x,y,z,I) , where the intensity I contains multiple values of wavelength. The multi-wavelength aspect has enabled a new level of detail in, e.g., vegetation studies, where hyperspectral sensing is a well-established method for identification and classification of targets and monitoring different plant activity [19]. Active hyperspectral sensing based on supercontinuum lasers has also been applied for long-range target characterization [20].

In this paper, we demonstrate the potential of multispectral target identification combined with multi-sensor indoor positioning, to provide one-shot spectral identification and position information for the targets. In our previous paper [21] we extended the target identification from 3D hyperspectral point clouds into industrial targets and built environment. We have shown in our earlier studies that the hyperspectral lidar (HSL) is capable of measuring different phenomena in 3D, such as leaf-level moisture in vegetation and its distribution over extended targets [16]. We have also developed algorithms for automatic classification of targets with both spectral and spatial features [22]. The ultimate aim of our research is to combine the hyperspectral lidar target detection with sensor positioning for a real-time SLAM method with improved optical sensing (point-wise target identification using spectral libraries) and autonomous indoor mapping. We also discuss the accuracy of our method and discuss its future prospects of providing autonomous target characterization from 3D features and spectral data in addition to autonomous mobility.

DATA AND METHODS

The Finnish Geospatial Research Institute Hyperspectral Lidar (FGI HSL) is a prototype multi-wavelength laser scanner [16], with a supercontinuum laser light source (420–2400 nm, 41 mW average optical power,

5 kHz pulse rate). The operation principle is the same as in a monochromatic pulse-based terrestrial lidar, but the output point cloud (x,y,z,I) contains the intensity I as a function of wavelength, i.e., an eight channel spectrum (500-1000 nm) is associated with each point (x,y,z) . The range measurement is based on the time-of-flight of the reflected laser waveform. An off-axis parabolic mirror is used as a primary optic to gather the returning laser pulses. The detector consists of a spectrograph (Specim Inspector V10), placed in front of a 16-element avalanche photodiode (APD) array. A high-speed (1 ns) digitizer enables data storage at 8 wavelength bands. Thus the detector system is multispectral, but the wavelength channels can be selected by adjusting the spectrograph position with respect to the APD array. A monochromator (Oriel, Cornerstone 74125) was used to calibrate the spectral responses of the APD elements. The scanning over the target was performed with a 2D scanner to produce a point cloud. See Figure 1 and [16] for more details on the instrument and data processing.

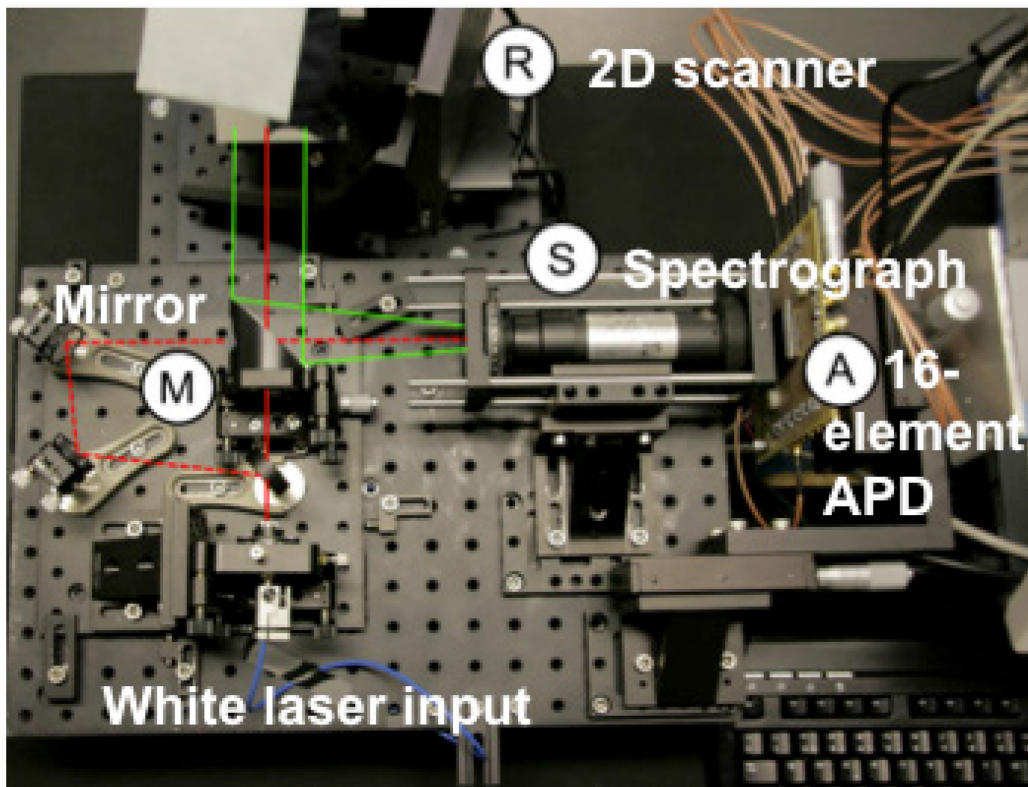


Figure 1: To ensure traces are distinguishable in black and white, please use a variety of shapes and/or dashed lines.

Three different targets were investigated (see also [21]): two were cardboard samples one of which was sprayed wet with water, and the third was a wooden panel with some mold on it. The targets were placed hanging on a wire in the middle of the area to be scanned. The HSL wavelength channels in this study were 536, 589, 634, 688, 741, 793, 848, and 951 nm. We scanned the entire corner of the laboratory to produce a point cloud (Figure 2), which was processed with MATLAB R2013a software (The MathWorks®, Inc). The samples were manually cropped from the point cloud to obtain the mean backscattered reflectance of all the echoes from each target. In further applications of this method, it is possible to replace the manual identification with algorithms developed for HSL data for automatic target identification [22],[23].

Towards Multispectral, Multi-Sensor Indoor Positioning and Target Identification

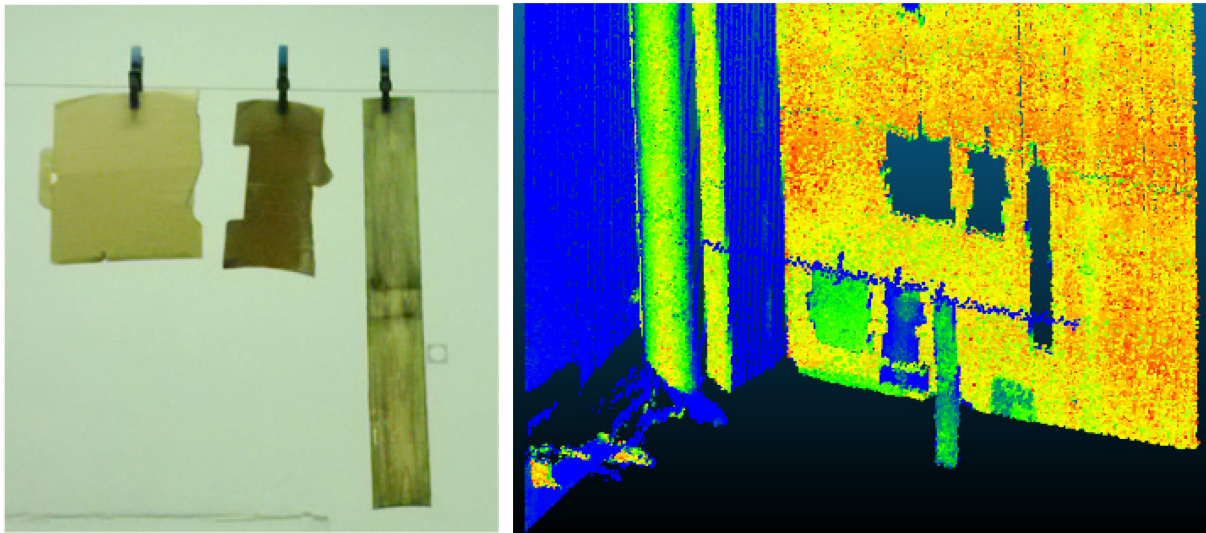


Figure 2: The targets hanged on a wire in the scanned area. The wet and dry cardboard samples are in the left and middle, respectively (left). The HSL point cloud of the room corner, showing the targets (right).

The multi-sensor three-dimensional indoor positioning solution in this experiment is computed by fusing the measurements obtained using a monocular camera, IMU, a barometer, and sonar. The goal of our research is to develop a hyperspectral multi-sensor SLAM solution, providing improved accuracy and reliability for localization.

Heading and velocity may be computed from the IMU measurements and when the initial position and orientation are known, a continuous position solution obtained by propagating the measurements in time. However, IMU alone is not sufficient for accurate positioning and therefore the measurements are fused with visual odometry, which also provides heading and velocity measurements. With a special configuration of the camera, namely knowing its height and being able to compute its orientation using image processing means [13] absolute translation measurements may be obtained. Visual odometry does not provide accurate vertical motion information and therefore a barometer will be used for obtaining height measurements. A barometer provides accurate height information by measuring changes in air pressure. However, the ambient pressure indoors may change significantly due to opening a window or due to air conditioning and therefore changes in height measured by a sonar sensor pointing down to the floor will be used to evaluate the reliability of obtained height measurements. More details of the measurement are given in [2].

Particle filtering (PF) [24] was used here for fusing the heading and translation measurements from a monocular camera and the IMU, a barometer, and sonar.

RESULTS

Figure 3 shows a close-up of all targets and their intensity at 720 nm and 818 nm. The spectra of the wet and dry cardboard panel are plotted in Figure 4. The spectra were obtained by extracting the object from the point cloud and averaging the intensity of all points at each wavelength channel. Overall, we have observed a 6% approximate error level in the reflectance measurement of the HSL detector. The difference in the intensity between different targets is visible at all wavelengths. The difference is more pronounced at near-infrared wavelengths greater than 1000 nm because of the strong water absorption [e.g., [20]]. However, these results enable us to demonstrate the use of spectral indices in target detection.

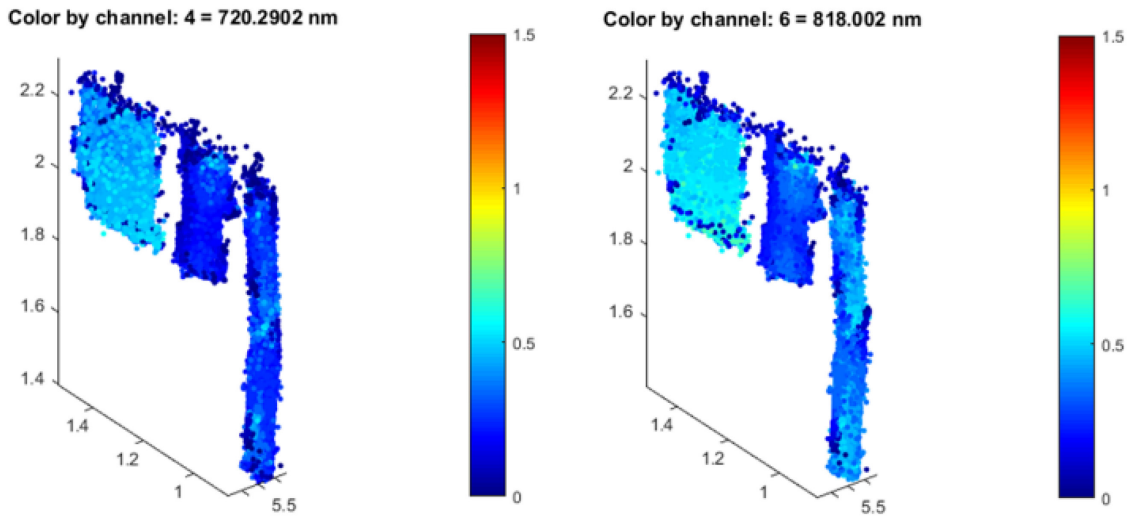


Figure 3: The targets cropped from the original point cloud. The intensity for each point is plotted in HSL channel 4: 720 nm (left) and 6: 818 nm (right). The dry and wet cardboard samples are in the left and middle, respectively (cf. Figure 2), while the wood sample is on the right.

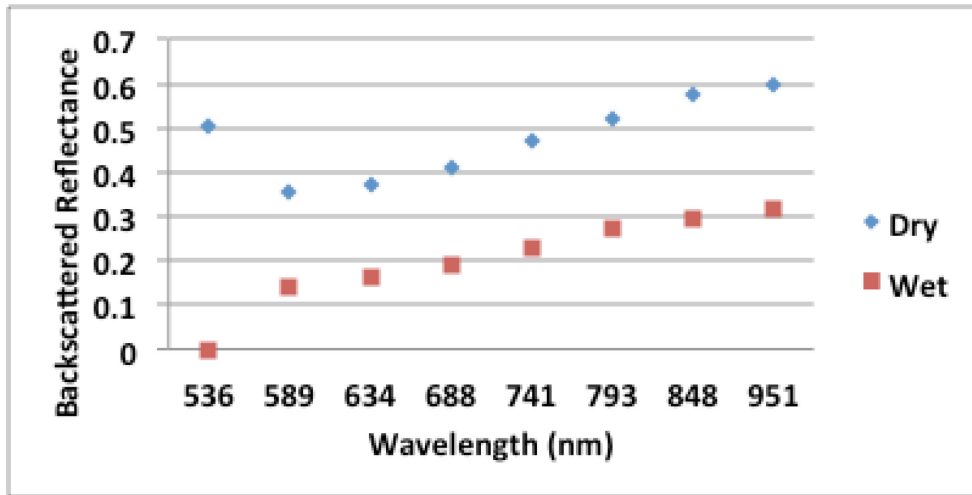


Figure 4: The 8-channel average spectra of the wet and dry cardboard targets.

The automatic target identification algorithms developed for the HSL data are based on 3D features extracted from the point cloud, combined with spectral identification using Spectral Correlation Mapping [23] or spectral indices [22]. As an example of spectral indices in identifying target characteristics, we computed two different water indices: the water concentration index WI [25], which is based on a water absorption band at 970 nm and reference wavelength (900 nm):

$$WI = \frac{R_{900}}{R_{970}} \tag{1}$$

As 900nm and 970 nm were not available in this measurement, we used 848 nm and 951 nm instead to obtain WI=0.96 for dry and WI=0.94 for wet sample, using the average spectra plotted in Figure 4.

Towards Multispectral, Multi-Sensor Indoor Positioning and Target Identification

We also compared the Normalized Water Index NWI [26]:

$$NWI = \frac{R_{970} - R_{850}}{R_{970} + R_{850}} \quad (2)$$

Again, we used 951 nm and 848 nm instead and obtained $NWI=0.02$ for dry and $NWI=0.33$ for the wet sample, using the values averaged over the entire sample. However, the NWI values show some variation over the targets, which is seen in the plotted extract of the point cloud in Figure 5, showing the NWI for both cardboard samples. Nevertheless, there is a visible difference between the wet and dry cardboard samples.

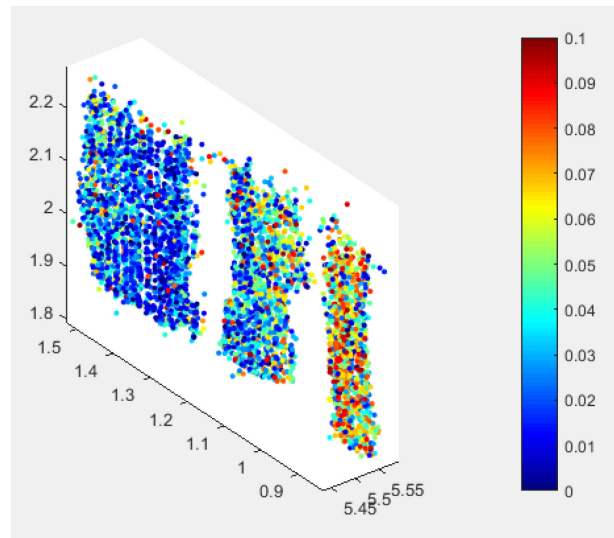


Figure 5: The Normalized Water Index $NWI = [R_{970} - R_{850}] / [R_{970} + R_{850}]$ (Eq. 2) plotted for each point in the point cloud extract showing all three targets. Cf. [23]. There is a difference in NWI between the wet and dry cardboard samples (middle and left, respectively).

The fused position solution was computed by navigating from outdoors to indoors into the room where the HSL sensor was located. The navigation trajectory is presented in Figure 6.



Figure 6: The navigation trajectory and the position of the HSL (cf. Figure 7).

The starting position and the attitude were obtained with a Novatel SPAN reference system, including a GPS receiver with a Honeywell HG1700 AG58 tactical grade IMU. After initializing the system the SPAN measurements were used only for a reference, the results presented below are obtained by comparing the fused position solution with the one computed from the reference system measurements.

Osmium MIMU22BT foot-mounted multiple IMU and GoPro Hero 3 action camera were used for horizontal positioning and XSENS MTi-G-700 Inertial Navigation system's (INS) barometer and HRUSB-MaxSonar sonar for vertical positioning. The positioning experiment was carried out at the premises of the FGI in Masala. The route walked was approximately 200 m and contained both outdoor and indoor parts, also including features that were challenging for both visual odometry and inertial sensing, such as spiral stairs. The Distance Root Mean Squared (DRMS) error of the computed horizontal position solution for the route was 3.4 m. For comparison we computed the horizontal position solution using an IMU only and the resulting DRMS was almost 6 m. Figure 7 shows the horizontal positioning solution for fused (blue) and reference (green) solutions. The mean error for the fused vertical position solution was 0.9 m, with standard deviation of 0.6 m, when computed by using IMU only 4.2m and 2.1m, respectively. Figure 8 shows the vertical positioning for fused (blue), IMU only (red) and reference (green) solutions.

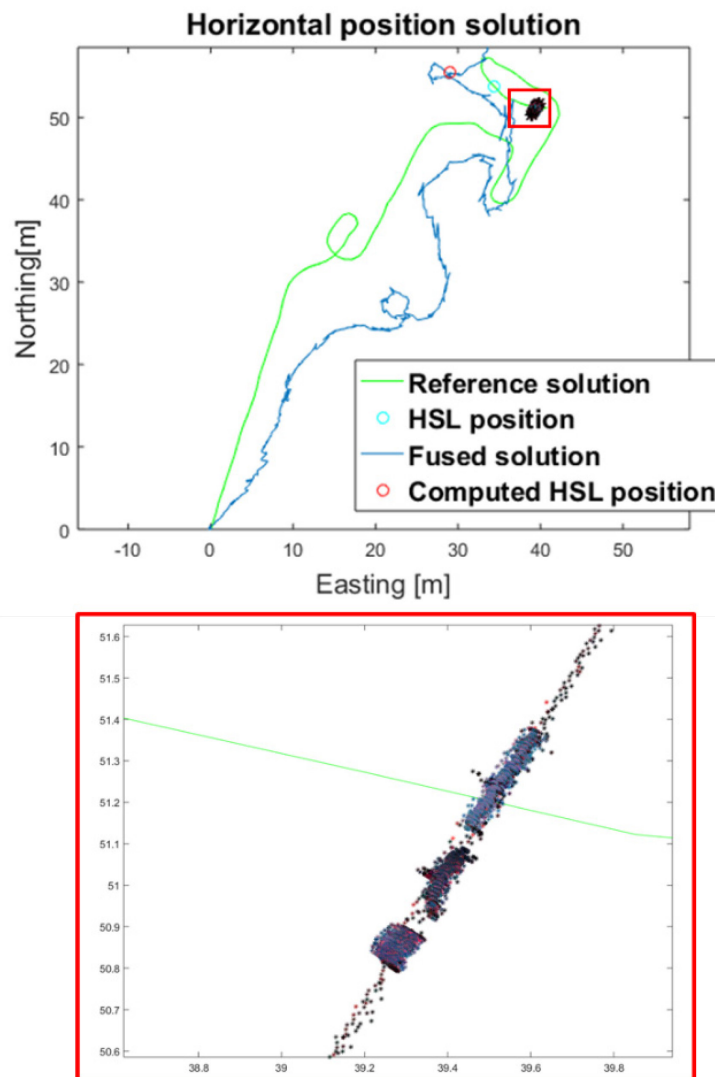


Figure 7: Top: Position solution for reference system (green) and fused solution (blue). The position of the HSL has been computed using the reference solution. Bottom: close-up showing the targets.

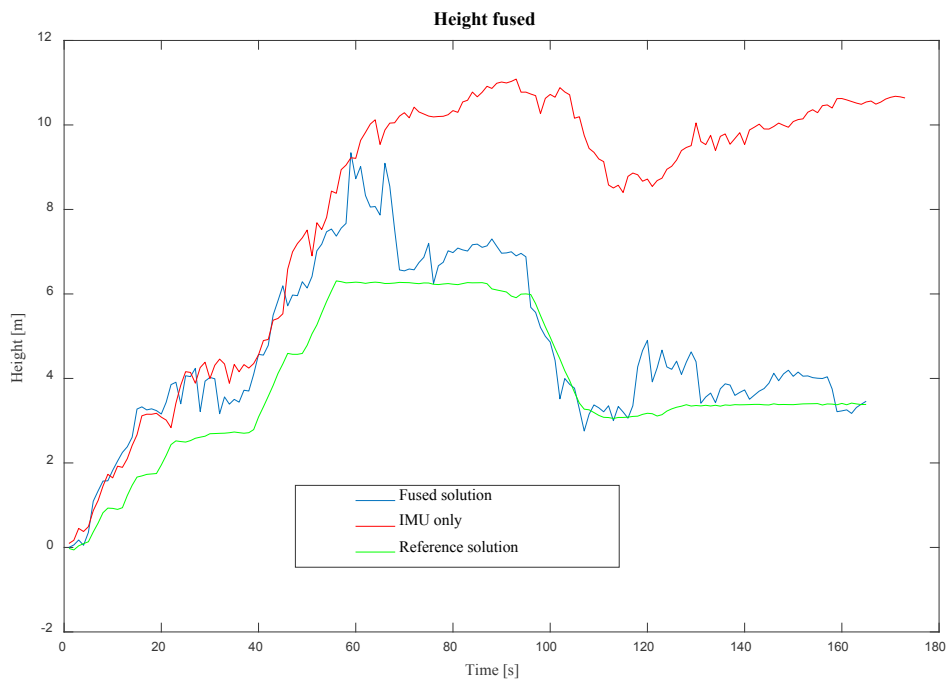


Figure 8: Vertical position solution for reference system (green), IMU only (red) and fused solution (blue).

DISCUSSION

Our results are similar (in terms of error levels) to those from non-GNSS positioning: [5] obtained a 5 m position drift in 1100 m using a non-GPS pedestrian navigation with a foot mounted IMU. The results were the same order as in [27], where the mean error was 4.87m for a set of half-an-hour walks, where the route varied from rectangular to random, and the step detection method was calibrated before each test. In our study, the route was challenging and contained height changes, such as spiral stairs, which complicated the measurement. Our method also aims at seamless outdoor-indoor navigation, which reduces the temperature stabilization time for the sensors.

CONCLUSION

The clear difference in the Normalized Water Index for wet and dry samples indicates the potential for using the NWI and other spectral indices in automatic target detection algorithms. In case of moisture based detection, the water absorption is stronger at wavelengths further in the near-infrared [cf. [20]], which means that in the future implementations of a hyperspectral instrument for indoor mapping, wavelengths greater than 1000 nm should also be considered.

We also presented the results for infrastructure-free indoor positioning to obtain the position of the HSL and hence the targets. The accuracy of the fused position solution was already feasible for most indoor positioning applications. However, in the future we will fuse the sensor positioning algorithms with measurements obtained from the HSL for an accurate SLAM solution. We anticipate the SLAM localization accuracy to improve up to decimetre level.

This study is the first step towards spatially resolved target identification and mapping. Although these results are preliminary, they show the potential of using a multispectral lidar enhanced indoor mapping in

localizing different targets and phenomena, such as humidity or mold in building structures. In future, this will enable the use of indoor SLAM not only for navigation of people or autonomous vehicles but also for autonomous surveillance in construction or security applications.

ACKNOWLEDGMENTS

This work was supported by Scientific Advisory Board for Defence of the Finnish Ministry of Defence (project INTACT (INfrastructure-free TACTical situational awareness)), and the Finnish Geospatial Research Institute (FGI), and the Finnish Funding Agency for Innovation (TEKES) (project 1515/31/2016: 'Efficient and safe identification of minerals: smart real-time methods').

REFERENCES

- [1] He, X., Aloï, D., Li, J.: 'Probabilistic Multi-Sensor Fusion Based Indoor Positioning System on a Mobile Device', *Sensors*, 2015, **15**, (12), pp. 31464–31481, doi:10.3390/s151229867.
- [2] Ruotsalainen, L., Kirkko-Jaakkola, M., Chen, L., Gröhn, S., Guinness, R., Kuusniemi, H.: 'Multi-Sensor SLAM for Tactical Situational Awareness', ION ITM, Monterey, California, January 2016.
- [3] Lai, Y.C., Chang, C. C., Tsai, C. M., Lin, S. Y., Huang, S. C.: 'Development of a pedestrian indoor navigation system based on multi-sensor fusion and fuzzy logic estimation algorithms', *Int. Arch. Photogramm. Remote Sens. Spatial Inf. Sci.*, 2015, **XL-4**, (W5), pp. 81–86, doi:10.5194/isprsarchives-XL-4-W5-81-2015.
- [4] Balazadegan Sarvrood, Y., S. Hosseinyalamdary, S., Gao, Y.: 'Visual-LiDAR Odometry Aided by Reduced IMU', *ISPRS International Journal of Geo-Information*, 2016, **5**, (1), p. 3, doi:10.3390/ijgi5010003.
- [5] Fourati H., 'Heterogeneous Data Fusion Algorithm for Pedestrian Navigation via Foot-Mounted Inertial Measurement Unit and Complementary Filter', *IEEE Trans. Instrum. Meas.*, 2015, **64**, (1), pp.221–9, doi:10.1109/TIM.2014.2335912.
- [6] Mai, Y.-C., Lai, Y.-C.: 'Development of an indoor positioning and navigation system using monocular SLAM and IMU', SPIE 10011, First International Workshop on Pattern Recognition, Tokyo, Japan, May 2016, p. 100111L, doi:10.1117/12.2242920.
- [7] Barber, D., Mills, J., Smith-Voysey, S.: 'Geometric validation of a ground-based mobile laser scanning system', *ISPRS J. Photogramm. Remote Sens.*, 2008, **63**, (1), pp.128–41, doi:10.1016/j.isprsjprs.2007.07.005.
- [8] Riaz, Z., Pervez, A., Ahmer, M., Iqbal, J.: 'A fully autonomous indoor mobile robot using SLAM', International Conference on Information and Emerging Technologies (ICIET), Karachi, Pakistan, June 2010, pp. 1–6, doi:10.1109/ICIET.2010.5625691.
- [9] N. Haala, N., Fritsch, D., Peter, M., Khosravani, A.M.: 'Pedestrian Mobile Mapping System For Indoor Environments Based On MEMS IMU And Range Camera', *Archives of Photogrammetry, Cartography and Remote Sensing*, 2011, **22**, pp. 159-172.
- [10] Chen, Z., Samarabandu, J., Rodrigo, R.: 'Recent advances in simultaneous localization and map-building using computer vision', *Advanced Robotics*, 2007, **21**, (3–4), pp. 233–65, doi:10.1163/156855307780132081.

Towards Multispectral, Multi-Sensor Indoor Positioning and Target Identification

- [11] Mutz, F., Veronese, L.P., Oliveira-Santos, T., de Aguiar, E., Auat Cheein, F.A., Ferreira De Souza, A.: 'Large-scale mapping in complex field scenarios using an autonomous car', *Expert Systems with Applications*, 2016, **46**, pp. 439–62, doi:10.1016/j.eswa.2015.10.045.
- [12] S. Hong, Ko, S., Kim, J.: 'VICP: Velocity updating iterative closest point algorithm', IEEE International Conference on Robotics and Automation, Anchorage, AK, USA, May 2010, pp. 1893–1898.
- [13] Ruotsalainen L., 'Vision-Aided Pedestrian Navigation for Challenging GNSS Environments', PhD Thesis, Suomen geodeettisen laitoksen julkaisuja - Publications of the FGI;151. ISBN:978-951-711-303-8, 2013. <http://tutcris.tut.fi/portal/files/7748951/ruotsalainen.pdf>.
- [14] Hartley, R.I., Zisserman, A., 'Multiple View Geometry in Computer Vision', 2nd ed. Cambridge University Press, ISBN: 0521540518, 2004.
- [15] Tang, J., Chen, Y., Jaakkola, A., Liu, J., Hyyppä, J., Hyyppä, H.: 'NAVIS-An UGV Indoor Positioning System Using Laser Scan Matching for Large-Area Real-Time Applications', *Sensors*, 2014, **14**, (7), pp. 11805-11824, doi: 10.3390/s140711805.
- [16] Hakala, T., Suomalainen, J., Kaasalainen, S., Chen, Y.: 'Full waveform hyperspectral LiDAR for terrestrial laser scanning', *Optics Express*, 2012, **20**, (7), p. 7119-7127, doi:10.1364/OE.20.007119.
- [17] Douglas, E.S., Martel, J., Li, Z., Howe, G., Hewawasam, K., Marshall, R.A., et al.: 'Finding Leaves in the Forest: The Dual-Wavelength Echidna Lidar', *IEEE Geosci. Remote Sensing Lett.*, 2015, **12**, (4), pp. 776–80, doi:10.1109/LGRS.2014.2361812.
- [18] Danson, F.M., Gaulton, R., Armitage, R.P., Disney, M., Gunawan, O., Lewis, P., et al., 'Developing a dual-wavelength full-waveform terrestrial laser scanner to characterize forest canopy structure', *Agric. Forest Meteorol.*, 2014, **198–199**, pp. 7–14, doi:10.1016/j.agrformet.2014.07.007.
- [19] Li, W., Sun, G., Niu, Z., Gao, S., Qiao, H.: 'Estimation of leaf biochemical content using a novel hyperspectral full-waveform LiDAR system', *Remote Sensing Letters*, 2014, **5**, (8), pp. 693–702, doi:10.1080/2150704X.2014.960608.
- [20] Manninen, A., Kääriäinen, T., Parviainen, T., Buchter, S., Heiliö, M., Laurila, T.: 'Long distance active hyperspectral sensing using high-power near-infrared supercontinuum light source', *Optics Express*, 2014, **22**, (6), pp. 7172-7177, doi:10.1364/OE.22.007172.
- [21] Kaasalainen, S., Gröhn, S., Nevalainen, O., Hakala, T., Ruotsalainen, L.: 'Work in Progress: Combining Indoor Positioning and 3D Point Clouds from Multispectral Lidar', Indoor Positioning and Indoor Navigation (IPIN), Alcalá de Henares, Spain, October 2016.
- [22] Puttonen, E., Hakala, T., Nevalainen, O., Kaasalainen, S., Krooks, A., Karjalainen, M., et al.: 'Artificial target detection with a hyperspectral LiDAR over 26-h measurement', *Optical Engineering*, 2015, **54**, (1), p. 13105, doi:10.1117/1.OE.54.1.013105.
- [23] Suomalainen, J., Hakala, T., Kaartinen, H., Räikkönen, E., Kaasalainen, S.: 'Demonstration of a virtual active hyperspectral LiDAR in automated point cloud classification', *ISPRS J. Photogramm. Remote Sens.*, 2011, **66**, (5), pp.637–641, doi:10.1016/j.isprsjprs.2011.04.002.
- [24] Arulampalam, M.S., Maskell, S., Gordon, N., Clapp, T.: 'A tutorial on particle filters for online nonlinear/non-Gaussian Bayesian tracking', *IEEE Trans. Signal Process.*, 2002, **50**, (2), pp. 174–188, doi:10.1109/78.978374.

- [25] PeñUelas, J., Filella, I., Biel, C., Serrano, L., Savé, R.: ‘The reflectance at the 950–970 nm region as an indicator of plant water status’, *Int. J. Remote Sens.*, 1993, **14**, (10), pp. 1887–1905, doi:10.1080/01431169308954010.
- [26] Gutierrez, M., Reynolds, M.P., Klatt, A.R.: ‘Association of water spectral indices with plant and soil water relations in contrasting wheat genotypes’, *J. Exp. Bot.*, 2010, **61**, 12, pp. 3291–3303, doi:10.1093/jxb/erq156.
- [27] Bebek, Ö., Suster, M.A., Rajgopal, S., Fu, M.J., Huang, X., Cavusoglu, M.C., et al.: ‘Personal Navigation via High-Resolution Gait-Corrected Inertial Measurement Units’, *IEEE Trans. Instrum. Meas.*, 2010, **59**, (11), pp. 3018–3027, doi:10.1109/TIM.2010.2046595.

**Towards Multispectral,
Multi-Sensor Indoor Positioning and Target Identification**

